

Deep-ribbed for strength, Hi-Rib Panel is a tailored, modern look for buildings, sheds or patio covers. High 3/4" rib on 8" centers. 26" wide with 24" coverage. Hi-Rib is a narrow panel, making it much easier to install.



KEY FEATURES

- 26 gauge
- ASTM 653 and 792
- 24" roof and wall coverage
- Recommended minimum pitch 3:12
- Panel is available in a variety of "Cool" baked on ARMORTECH™ colors
- Easy-to-order standard and custom made trim and accessory packages available for specific project needs
- Color matched neoprene washered screws
- Custom cuts 3' to 33'

GAUGE	24"	30"	36"	42"	48"	60"
26	196	132	91	67	51	41

Notes:


1. Continuous over three spans
2. Structural design analysis per AISI Specification of the Design of Cold-Formed Steel Structural Members, 1968
3. For wind loads, a 1/3 increase in loads is allowed

MATERIAL SPECIFICATIONS


- 26 gauge bare Zinalume® Plus with Clear Acrylic Coating AZ-55
- 26 and 29 gauge bare Galvanized (G-90)
- 29 gauge Glacier White
- 29 gauge Zinalume® Plus AZ-55

KEY FEATURES

- 9 Standard Colors, 1 Kynar 500® Color, Zinalume® and Galvanized
- ARMORTECH™ Paint System - the ultimate exterior durability
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior Quality, two coat SMP resin system at 1mm thickness

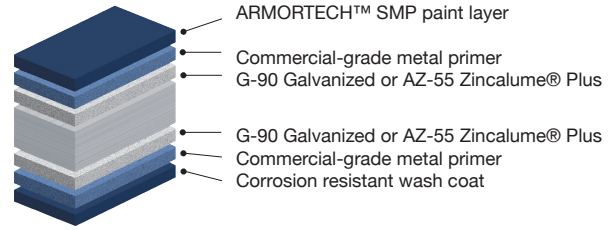

STANDARD COOL ARMORTECH™ SMP COLORS 40-Year Residential Manufacturer's Limited Warranty

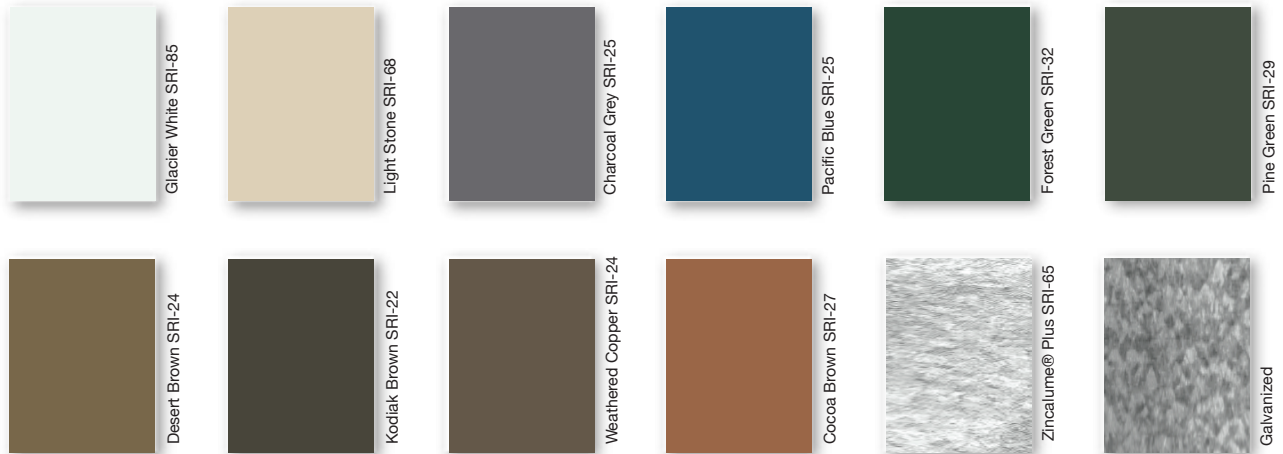

Copper Penny is a “Cool” Kynar 500® Premium Metallic Color

These printed chips provide a close representation of the colors. Metal samples are available upon request. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing. “Oil canning” is an inherent characteristic of Roof & Wall products, not a defect, and is not a cause for panel rejection.