



2.5" Corrugated Panel is a familiar all-purpose panel. 26" wide with 10 corrugations on 2.67" centers, 21" coverage on the roof (lap 2 corrugations), 24" coverage on siding (lap 1 corrugation). It's a perfect panel for interior liner panels or an aesthetic wall panel.

### SINGLE LAP

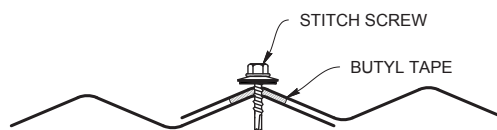

### DOUBLE LAP

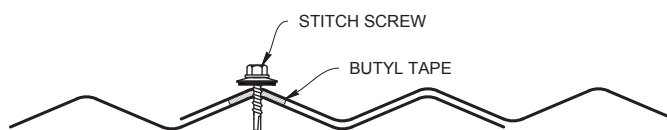

## KEY FEATURES

- 26 gauge
- ASTM 653 and 792
- 24" wall coverage and 21" roof coverage
- Recommended minimum pitch 3:12
- Galvanized panels are convenient for animal confinement
- Panel is available in a variety of "Cool" baked on ARMORTECH™ colors
- Easy-to-order standard and custom made trim and accessory packages available for specific project needs
- Color matched neoprene washered screws
- Custom cuts 3' to 33'

GAUGE	24"	30"	36"	42"	48"	60"
26	138	88	61	45	35	22

### Notes:


1. Continuous over three spans
2. Structural design analysis per AISI Specification of the Design of Cold-Formed Steel Structural Members, 1968
3. For wind loads, a 1/3 increase in loads is allowed

## MATERIAL SPECIFICATIONS

- 26 gauge bare Zinalume® Plus with Clear Acrylic Coating AZ-55
- 26 and 29 gauge bare Galvanized (G-90)
- 29 gauge Glacier White
- 29 gauge Zinalume® Plus AZ-55


## KEY FEATURES

- 9 Standard Colors, 1 Kynar 500® Color, Zinalume® Plus and Galvanized
- ARMORTECH™ Paint System - the ultimate exterior durability
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior Quality, two coat SMP resin system at 1mm thickness

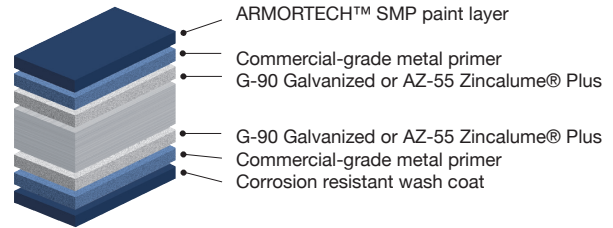

## STANDARD COOL ARMORTECH™ SMP COLORS

40-Year Residential Manufacturer's Limited Warranty

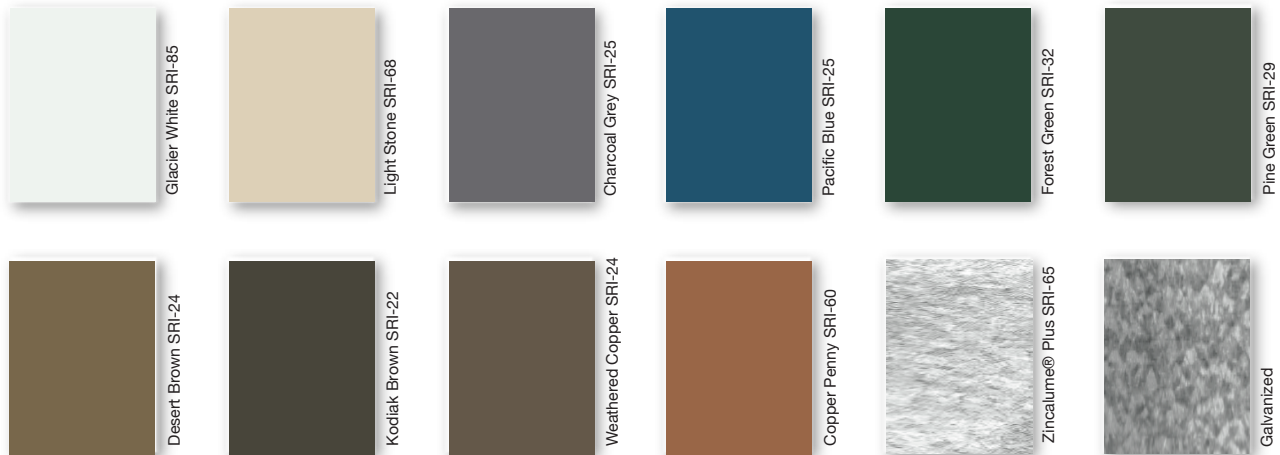

Copper Penny is a “Cool” Kynar 500® Premium Metallic Color

These printed chips provide a close representation of the colors.

Metal samples are available upon request.

SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing.

“Oil canning” is an inherent characteristic of Roof & Wall products, not a defect, and is not a cause for panel rejection.