

4-V panel combines strength of corrugated panels with the weather sealing capability of V-laps. Excellent on roofs with mild curves and for horizontal application. 4-V gives buildings the perfect rustic look.



## KEY FEATURES

- 26 gauge
- ASTM 653 and 792
- 24" roof and wall coverage
- Recommended minimum pitch 3:12
- Panel is available in a variety of "Cool" baked on ArmorTech™ colors
- Easy-to-order standard and custom made trim and accessory packages available for specific project needs
- Color matched neoprene washered screws
- Custom cuts 3' to 33'

GAUGE	24"	30"	36"	42"	48"	54"	60"	66"	72"
26	138	88	61	45	35	27	22	18	15

### Notes:


1. Continuous over three spans
2. Structural design analysis per AISI Specification of the Design of Cold-Formed Steel Structural Members, 1968
3. For wind loads, a 1/3 increase in loads is allowed

## MATERIAL SPECIFICATIONS


- 29 gauge ArmorTech™ Painted Steel (Glacier White)  
.015" (thickness before paint)  
G-90 Galvanized or AZ50
- 26 gauge ArmorTech™ Painted Steel  
.019" (thickness before paint)  
G-90 Galvanized or AZ50
- 26 and 29 gauge bare Zincalume® Plus AZ-55  
(No finish warranty – 25 yr. perforation warranty)
- 26 and 29 gauge bare Galvanized G-90  
(No finish warranty – no perforation warranty)

## KEY FEATURES

- 10 Standard Colors, 1 Kynar 500® Color, Zincalume® Plus and Galvanized
- ArmorTech™ Paint System - excellent in exterior durability
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior Quality, two coat SMP resin system at 1 mil. thickness

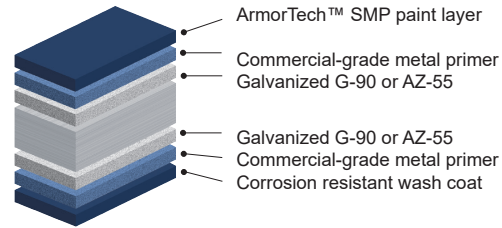

## STANDARD COOL ARMORTECH™ SMP COLORS 40-Year Residential Manufacturer's Limited Warranty

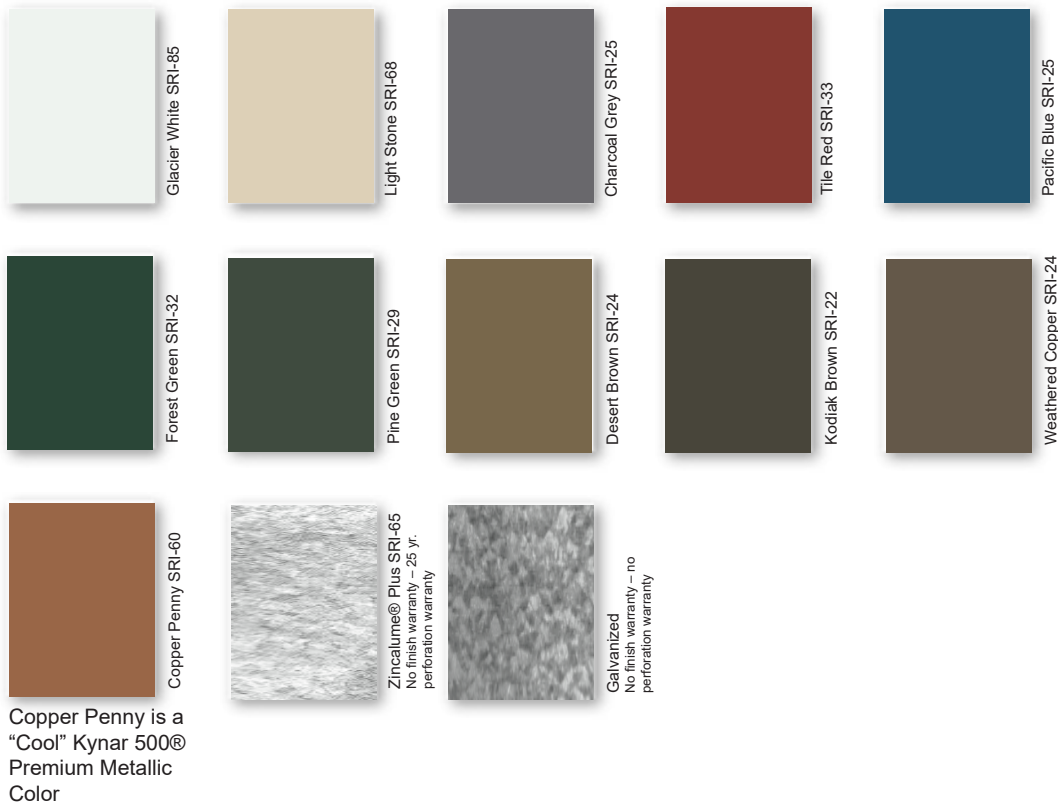

These printed chips provide a close representation of the colors.

Metal samples are available upon request.

SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing.

“Oil canning” is an inherent characteristic of Roof & Wall products, not a defect, and is not a cause for panel rejection.