


Wide-Rib™ is much like the 2 ft. wide Hi-Rib Panel in shape, except it covers 3 ft., which makes it easier to handle and reduces labor time.

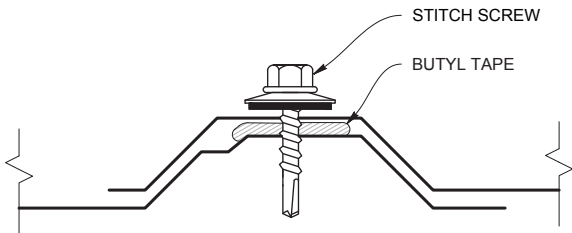

KEY FEATURES

- 29 gauge
- ASTM 653 and 792
- 36" roof and wall coverage
- Recommended minimum pitch 3:12
- Panel is available in a wide variety of "Cool" baked on ArmorTech™ colors
- Easy-to-order standard and custom made trim and accessory packages available for specific project needs
- Color matched neoprene washered screws
- Custom Cuts 3' to 33'

GAUGE	24"	30"	36"	48"	60"
29	138	88	61	29	16

Notes:


1. Continuous over three spans
2. Structural design analysis per AISI Specification of the Design of Cold-Formed Steel Structural Members, 1968
3. For wind loads, a 1/3 increase in loads is allowed

MATERIAL SPECIFICATIONS


- 29 gauge ArmorTech™ Painted Steel .015" (thickness prior to painting) G-90 Galvanized or AZ-50 Zincalume®
- 29 gauge bare Zincalume® Plus AZ-55 (No finish warranty – 25 yr. perforation warranty)
- 29 gauge bare G-90 Galvanized (No finish warranty – no perforation warranty)

KEY FEATURES

- 20 Standard Colors, Zincalume® Plus and Galvanized
- ArmorTech™ Paint System - excellent in exterior durability
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior Quality, two coat SMP resin system at 1 mil. thickness

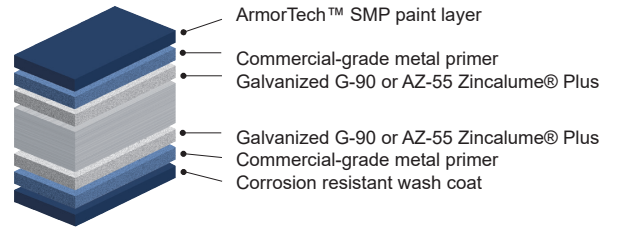

STANDARD COOL ARMORTECH™ SMP COLORS
40-Year Residential Manufacturer's Limited Warranty

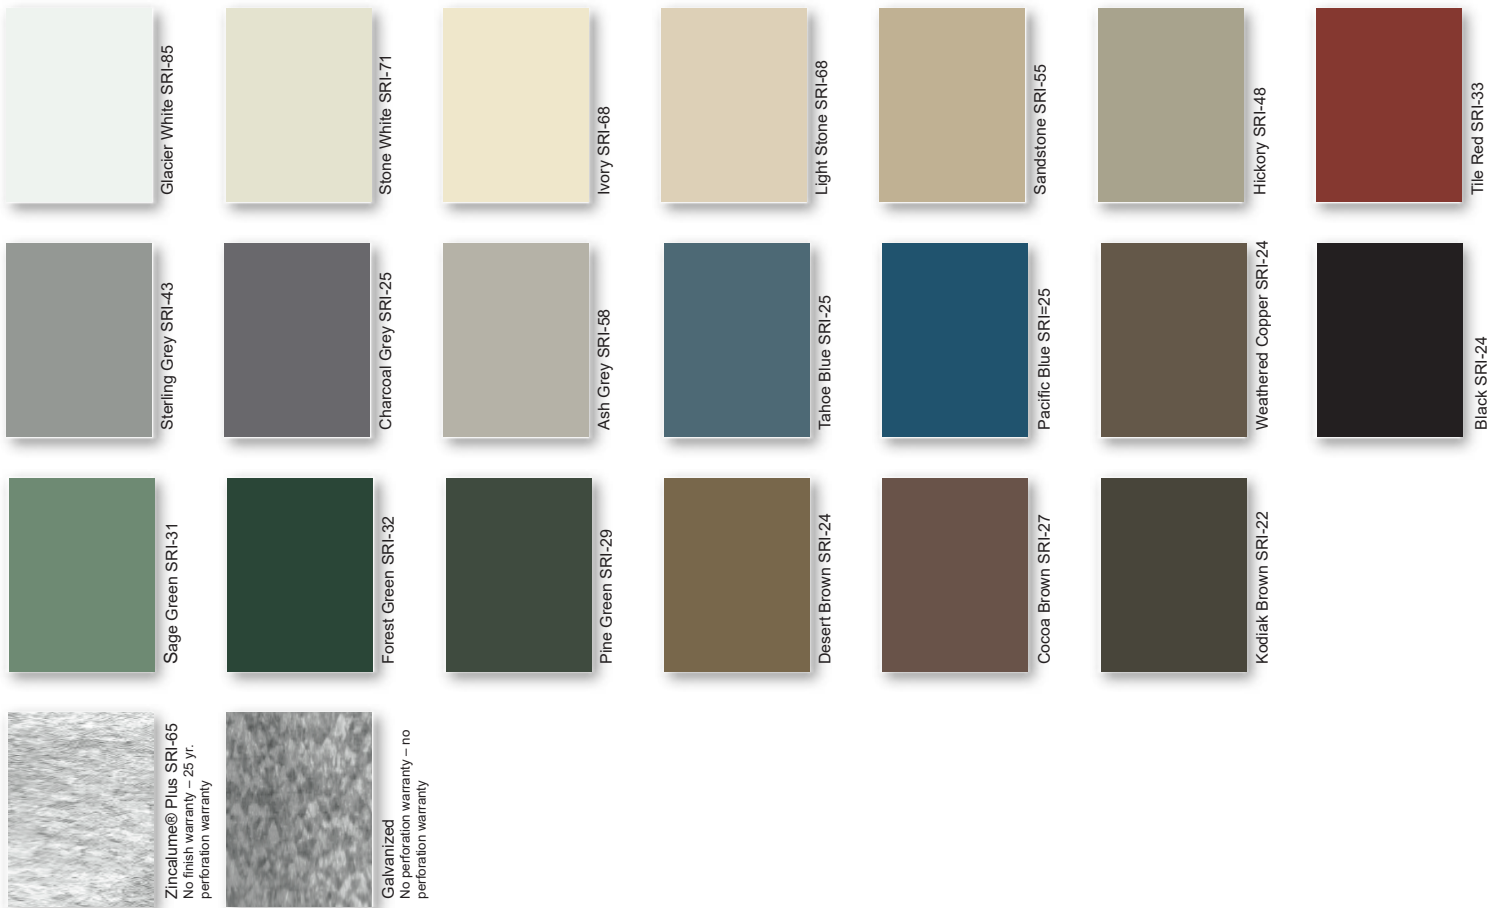

These printed chips provide a close representation of the colors. Metal samples are available upon request. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing. “Oil canning” is an inherent characteristic of Roof & Wall products, not a defect, and is not a cause for panel rejection.

