



2.5" Corrugated Panel is a familiar all-purpose panel. 26" wide with 10 corrugations on 2.67" centers, 21" coverage on the roof (lap 2 corrugations), 24" coverage on siding (lap 1 corrugation). It's a perfect panel for interior liner panels or an aesthetic wall panel.

### SINGLE LAP

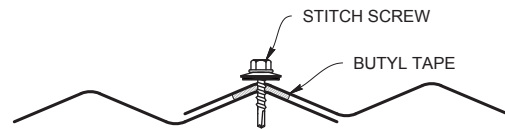

### DOUBLE LAP

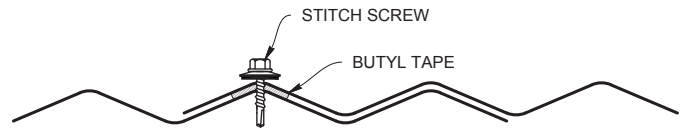

## KEY FEATURES

- 29 and 26 gauge Tru-gauge™
- ASTM 653 and 792
- Unique design only requires single lap for roof applications
- Recommended minimum pitch 3:12
- Custom lengths 1' to 30' - No short length cut charge  
(For longer lengths please inquire)
- Long length flashings available up to 20'11"
- Fiberglass skylight panels available - 24" wide, 12" length
- Panel is available in Zincolume® Plus AZ-55, Galvanized G-90, and 22 gauge Rusteel Plus™ (A606)
- Easy-to-order standard and custom made trim and accessory packages available for specific project needs
- Galvanized panels are convenient for animal confinement

GAUGE	24"	30"	36"	42"	48"	60"
26	138	88	61	45	35	22

### Notes:


1. Continuous over three spans
2. Structural design analysis per AISI Specification of the Design of Cold-Formed Steel Structural Members, 1968
3. For wind loads, a 1/3 increase in loads is allowed

## MATERIAL SPECIFICATIONS


- 29 gauge ArmorTech™ Painted Steel (Glacier White) .015" (thickness before paint)  
G-90 Galvanized or AZ50
- 26 gauge ArmorTech™ Painted Steel .019" (thickness before paint)  
G-90 Galvanized or AZ50
- 26 and 29 gauge bare Zinalume® Plus AZ-55  
(No finish warranty – 25 yr. perforation warranty)
- 26 and 29 gauge bare Galvanized G-90  
(No finish warranty – no perforation warranty)

## KEY FEATURES

- 10 Standard Colors, 1 Kynar 500® Color, Zinalume® Plus and Galvanized
- ArmorTech™ Paint System - excellent in exterior durability
- "Cool" color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior Quality, two coat SMP resin system at 1 mil. thickness

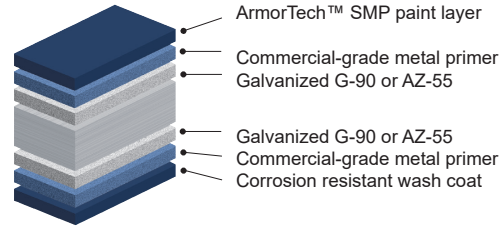

## STANDARD COOL ARMORTECH™ SMP COLORS 40-Year Residential Manufacturer's Limited Warranty

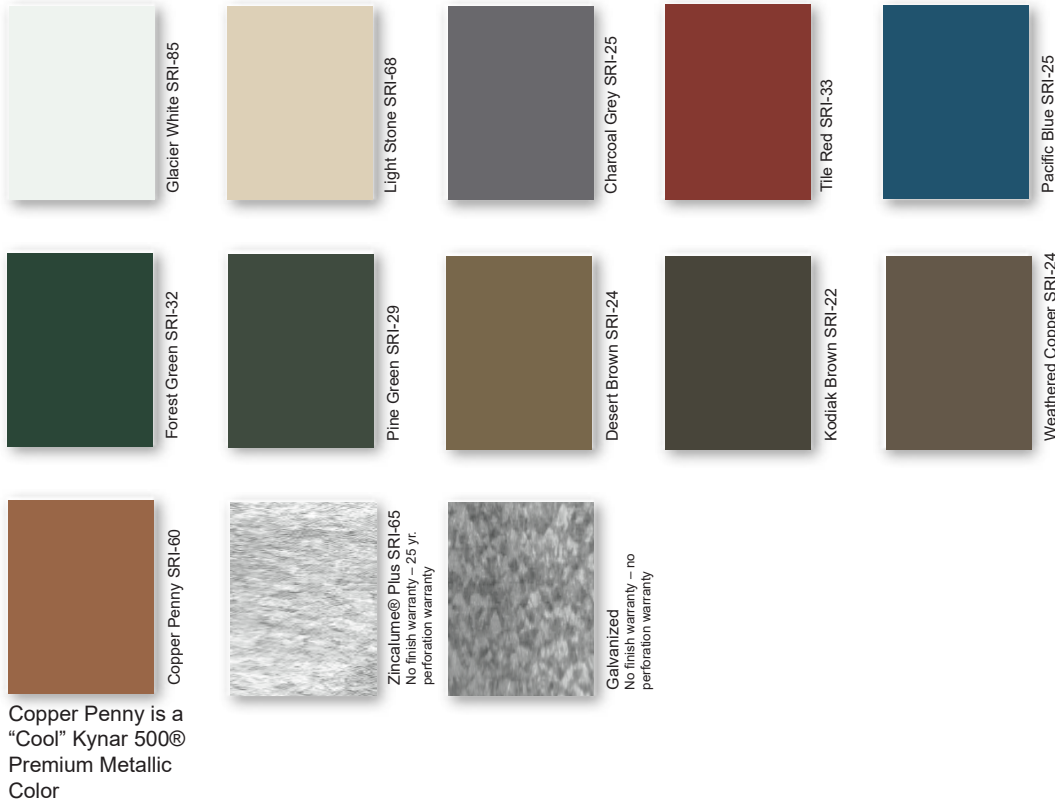

These printed chips provide a close representation of the colors.

Metal samples are available upon request.

SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing.

"Oil canning" is an inherent characteristic of Roof & Wall products, not a defect, and is not a cause for panel rejection.