



Max Corr. is an economical, structural, light gauge exposed fastener roof and wall panel. It's an excellent choice for commercial, industrial and agricultural application. Also it's perfect for interior liner panels or an aesthetic wall panel. This unique, wider profile reduces installation costs when compared to traditional 24" 2-1/2" corrugated panels.

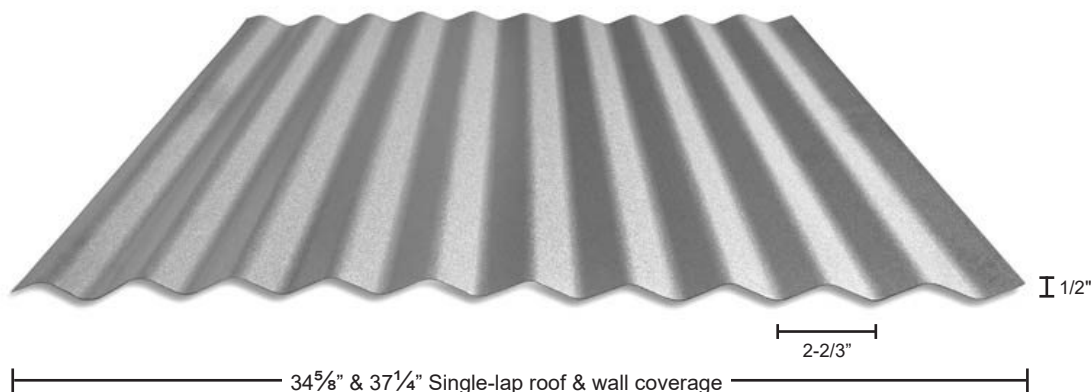

LAP DETAIL

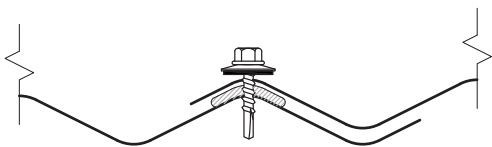

KEY FEATURES

- 29, 26, 24 and 22 gauge Tru-gauge™ .032 Aluminum
- ASTM 653 and 792
- Unique design only requires single lap for roof applications
- Recommended minimum pitch 3:12
- Custom lengths 1' to 30' - No short length cut charge (*For longer lengths please inquire*)
- Fiberglass skylight panel available in white, 24" wide 12' length
- G-90 Galvanized panels are convenient for animal confinement application
- Panel is also available in a wide variety of "Cool" baked on ArmorTech™ or "Cool" baked on Kynar 500® colors. Rusteel Plus™ (A606) and .032 Aluminum
- Long length flashings available up to 20'11"
- Panel is available in Zinalume® Plus AZ-55, G- 90 Galvanized, and 22 gauge Rusteel Plus™ (A606)
- Easy-to-order standard and custom made trim and accessory packages available for specific project needs

Allowable Live Load in PSF			Span in feet (steel only)			
SPAN TYPE	GAUGE	KSI	2'	2' 6"	3'	4'
CONTINUOUS SPAN	26	80	138	88	61	35
CONTINUOUS SPAN	29	80	98	62	43	25

MATERIAL SPECIFICATIONS


- 29 gauge ArmorTech™ Painted Steel
.015" (Thickness prior to painting)
G-90 Galvanized or AZ-50
- 26 gauge ArmorTech™ Painted Steel
.019" (Thickness prior to painting)
G-90 Galvanized or AZ-50
- 29, 26, 24 & 22 gauge bare Zinalume® Plus AZ-55
(No finish warranty – 25 yr. perforation warranty)
- 29, 26, 24 & 22 gauge bare G-90 Galvanized
(No finish warranty – no finish warranty)
- 24 gauge Kynar 500® Painted Steel
.0236" (Thickness prior to painting)
G-90 Galvanized or AZ-50
- 22 gauge Kynar 500® Painted Steel
.029" (Thickness prior to painting)
G-90 Galvanized or AZ-50
- .032" Kynar 500® Painted Aluminum
- Kynar 500® and substrate testing data available
(See website)

STANDARD COOL ARMORTECH™ SMP COLORS
40-Year Residential Manufacturer's Limited Warranty




40-Year Residential / 20 and 30 Year Commercial Manufacturer's Limited Warranty


STANDARD COOL KYNAR 500® COLORS

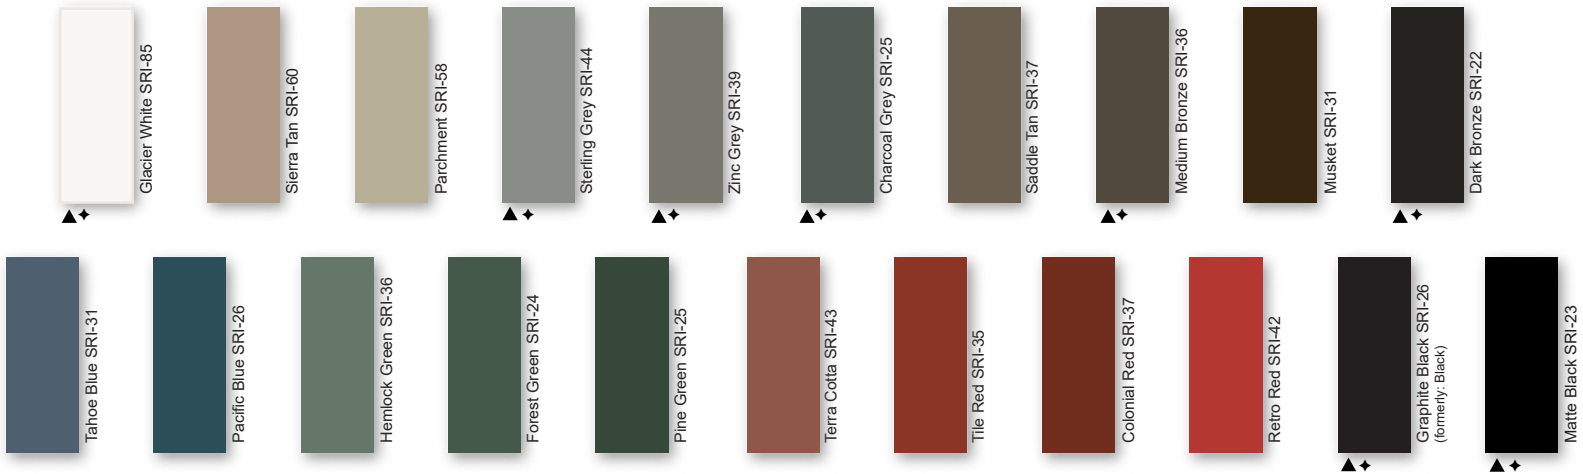

PREMIUM METALLIC COOL KYNAR® COLORS

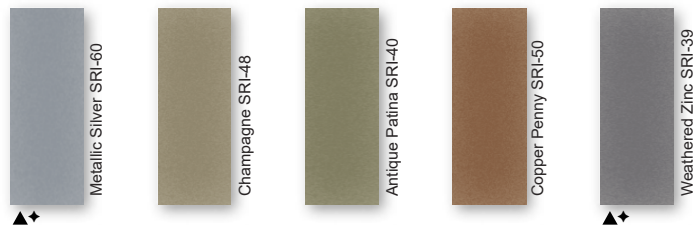

SPECIALIZED MATERIAL

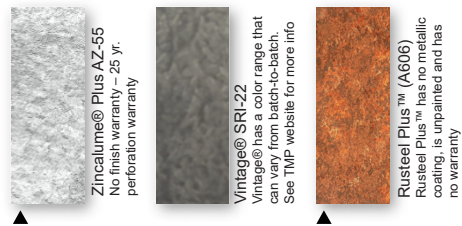

These printed chips provide a close representation of the colors.
Metal samples are available upon request. Coatings are low gloss 10-15% sheen.
SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E1980 and
are based on actual testing. ***Oil Canning is not a cause for material rejection***

Standard Panels			
Gauge	Color	LBS SQFT	LBS LF
26	ArmorTech	0.88	2.7
24	Kynar	1.2	3.45
22	▲	1.51	4.33
.032 Alum	◆	0.56	1.62
29	ArmorTech	0.64	2.02

